


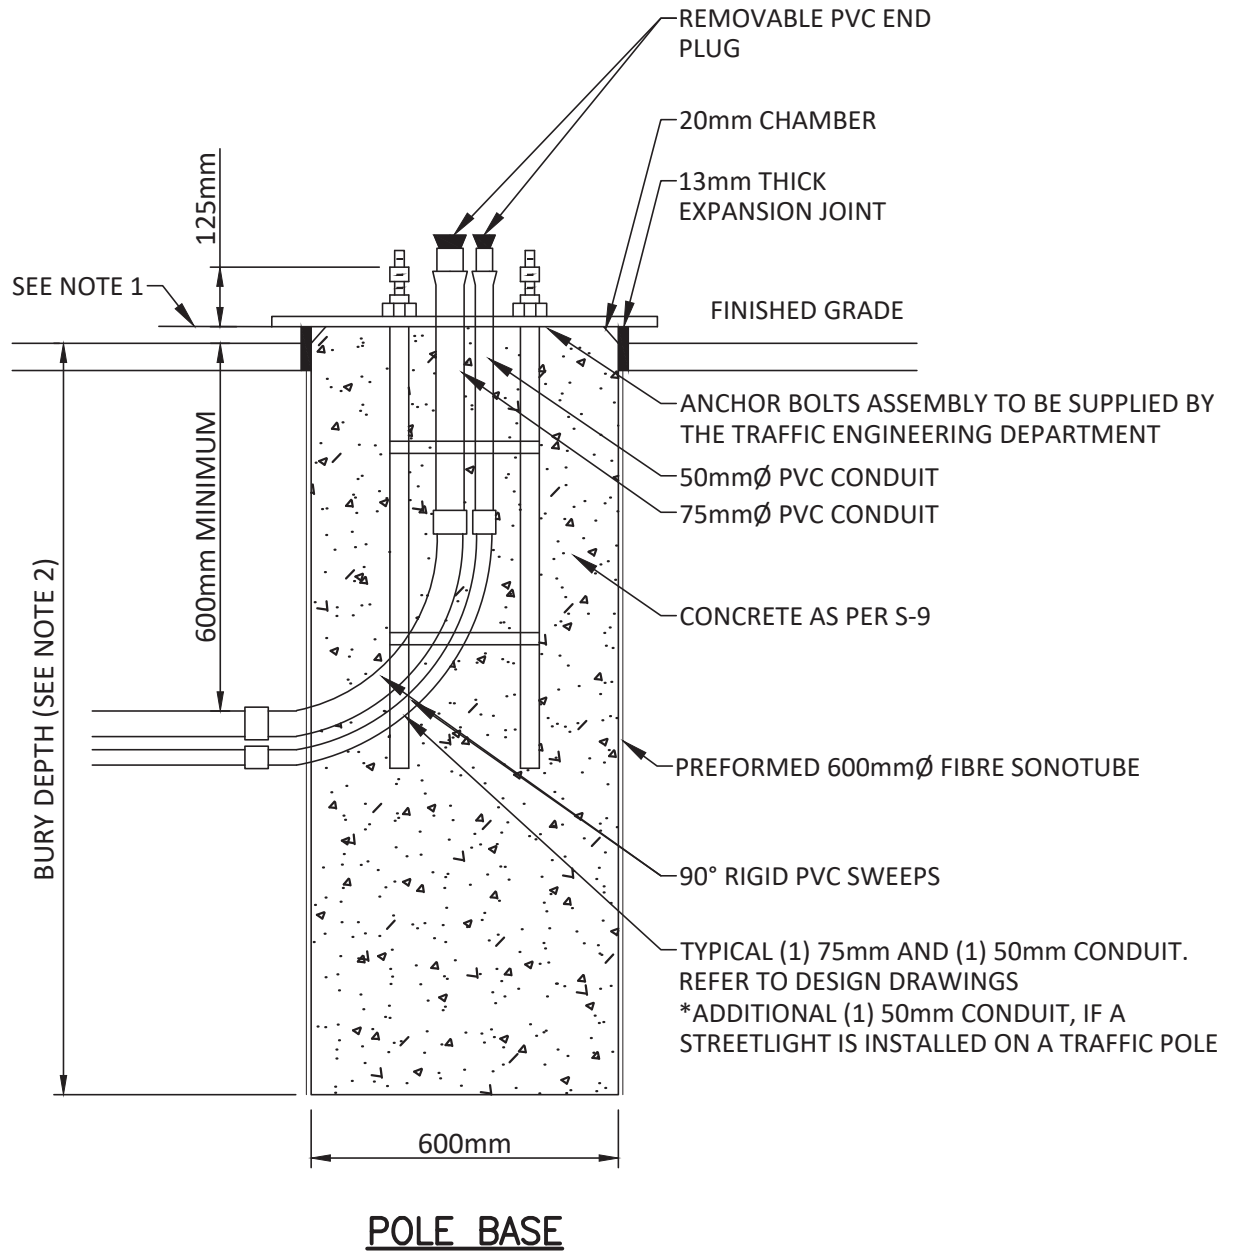

NOTES:

1. TOP OF FOOTING SHALL BE 20mm $\pm$ 15mm ABOVE FINISHED GRADE IN PAVED OR CONCRETE AREAS, MEASUREMENT TO BE TAKEN AT THE HIGHEST POINT OF GRADE WHEN INSTALLED ON/REAR A CURB RAMP.

TOP OF FOOTING SHALL BE 50mm $\pm$ 15mm ABOVE FINISHED GRADE IN EARTH OR GRANULAR AREAS.

2. BURY DEPTH OF POLE BASE AS FOLLOWS:
 - a) PXO POLES – 1.5m
 - b) TRAFFIC POLES – 2.0m
 - c) TRAFFIC POLES WITH STREETLIGHTS – 2.0m

 CITY OF WINDSOR OPERATIONS DEPARTMENT	
600mm DIAMETER POLE BASE	
DR'N BY: EH, AZ	DATE: JAN, 2023
REV. DATE: MAY, 2024	CH'KD BY (TRAF): PP
CH'KD BY (GEO): PJU	PASSED BY: ID
Mark Winterton Digitally signed by Mark Winterton Date: 2024.05.22 14:49:24 -04'00'	
CITY ENGINEER	TS-30

NOT TO SCALE